
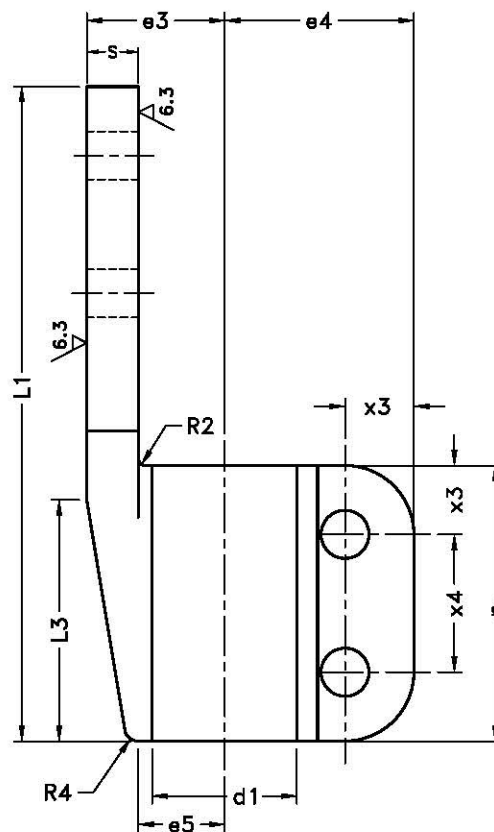
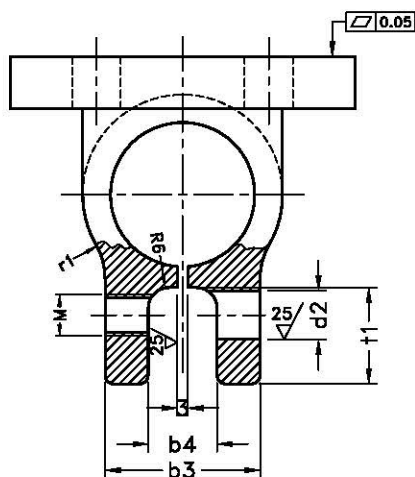


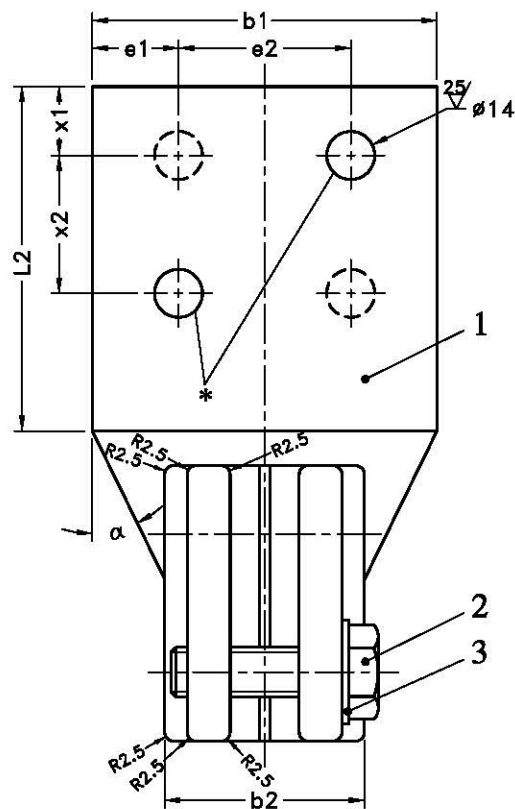

Uncertain tolerances according to DIN ISO 2768-m
Material : Brass (Cu Zn 40 Pb2)
Z : No. of holes (□4)

Table2

Type	Part 2	Part 3
EP 1250	M10x40	B10
FP 2000	M12x50	B12
FP 3150	M12x65	B12

Surface finish
DIN 3141 (Reihe 1)

Flag surface roughness: $\sqrt{R_z=6.3}$ DIN ISO 1302

Other surface roughness: $\sqrt{R_z=25}$ DIN ISO 1302

Geometrical surface specifications $\square 0.05$ DIN ISO 1101

Table1

Type	b1	b2	b3	b4	d1	d2	e1	e2	e3	e4	e5	x1	x2	x3	x4	n	L1	L2	L3	M	α	r1	t1	s	Z
EP 1250	60	45	36	16	M30x2	□12	17	26	28	40	19	17	26	15	30	60	130	60	52	M10	15°	15	22	10	2*
FP 2000	100	58	45	20	M42x3	□4	25	50	40	55	25	20	40	20	40	80	190	100	70	M12	26°	20	28	15	4
FP 3150	120	68	58	28	M48x3	□14	30	60	45	55	30	20	40	20	40	80	210	120	70	M12	30°	20	26	15	4

2	3	Spring washer		A2-70	acc.to table2	
	—	DIN 127				
2	2	Hex. bolt		A2-70	acc.to table2	
	—	DIN 933-8.8(DIN EN ISO 4017)				
1	1	Flag		Cu Zn40 Pb2 F		
	—	DIN 43675		DIN 43675		
Qt.	Item No.	Description		Material	Dimension	Mass. Kg
	Index		Identity No.	Standard		